



DCM-121050-G31 12V 825 CCA Dual Purpose AGM

Rechargeable Sealed Lead Acid Battery
DCM – Deep Cycle Marine Series

FEATURES

- Absorbent Glass Mat (AGM) technology for superior performance
- Dual terminals for starting and auxiliary equipment
- Valve regulated, maintenance free spill proof construction
- Power/volume ratio yielding excellent energy density
- Rugged vibration and impact resistant ABS case and cover
- Gas recombination technology
- 5 year design life
- Special additives in the acid paste ensure excellent performance in deep discharge situations
- Excellent power to volume ratio yielding high energy density

DEEP CYCLE MARINE SERIES

The Power Sonic DCM series of deep cycle marine batteries provide enhanced performance and excellent reliability in long duration cycling applications. Purpose built for marine applications that require regular and consistent cycling (charge and discharge), this deep cycle battery series offer an exceptionally long cycle life making them the ideal choice for marine applications.

GLOBAL HEADQUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation
365 Cabela Dr Suite 300,
Verdi, Nevada 89439
USA
T: +1 775 824 6500
E: customer-service@power-sonic.com

POWER-SONIC EMEA (EMEA – EUROPE, MIDDLE EAST AND AFRICA)

Smitzpol 4, 3861 RS Nijkerk,
The Netherlands
T NL: +31 33 7410 700
T UK: +44 1268 560 686
T FR: +33 344 32 18 17
E: salesEMEA@power-sonic.com

*PLEASE CONTACT POWER-SONIC TO CONNECT MORE THAN FOUR BATTERIES.
To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website.
© 2019, Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners.
All data subject to change without notice. E&O.E


PERFORMANCE SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	105 AH @ 20 HR
Reserve Capacity	200 Minutes
Dimensions	
Length (+/-2mm)	12.99" (330mm)
Width (+/-2mm)	6.81" (173mm)
Height (+/-4mm)	8.35" (212mm)
Total Height (w/terminal) (+/-4mm)	9.27" (235mm)
Minimum Weight	67.47 lbs (30.6 g)
Continuous Cold Cranking	825 CCA
Charge Cut-off Voltage	14.7 V
Recommended Charge Current	10.5 A - 21.0 A
Recommended Discharge Cut-Off Voltage	10.5 V
Cycle Charge (Initial Current ≤ 0.25C)	13.8 V – 14.4 V
Design Life	3-5 Years
Series Connection	Up to Four*
Parallel Connection	Up to Four*
Operating Temperature	5°F (-15°C) to 104°F (40°C)
Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	

Case ABS Plastic Rated to UL94:HB


*PLEASE CONTACT A POWER-SONIC REPRESENTATIVE TO CONNECT MORE THAN FOUR BATTERIES.

DIMENSIONS

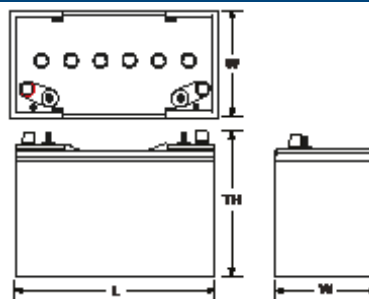

TERMINALS:

SAE: Dual Terminal




POS


NEG



Discharge Characteristics

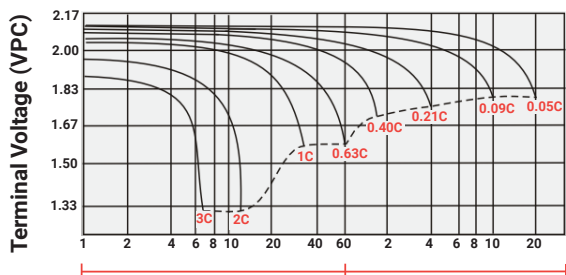

CYCLE LIFE @25°C

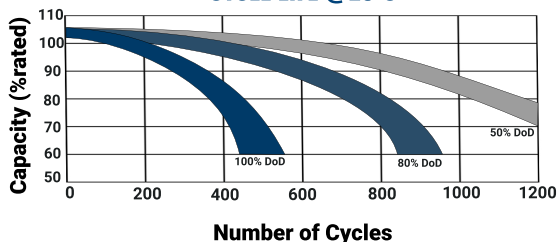

CHARGING

Cycle Applications: Apply constant voltage charge at 2.35 – 2.45 volts per cell at 20°C. Initial charging current should be set at less than C/5 Amps. Switch to float charge to avoid overcharging.

“Float” or “Stand-By” Service: Apply constant voltage charge of 2.25 – 2.30 volts per cell at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

APPLICATION

- Marine
- RV
- SLI
- OHV
- Deep Cycle
- Trolling

GLOBAL HEADQUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation
365 Cabela Dr Suite 300,
Verdi, Nevada 89439 USA
T: +1 775 824 6500
E: customer-service@power-sonic.com


POWER-SONIC EMEA (EMEA – EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk,
The Netherlands
T NL: + 31 33 7410 700
T UK: + 44 1268 560 686
T FR: + 33 344 32 18 17
E: salesEMEA@power-sonic.com


DCM-121050-G31 12V 825CA AGM

Rechargeable Sealed Lead Acid Battery
DCM – Deep Cycle Marine Series

CAPACITY RETENTION

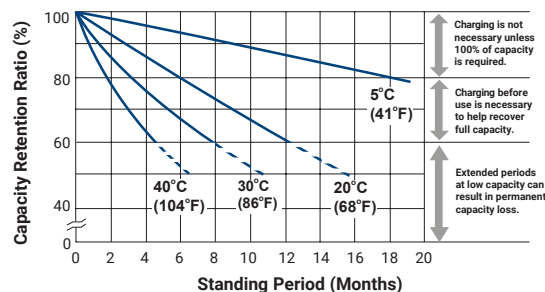

CHARGING CHARACTERISTICS @ C/5 AND 25°C

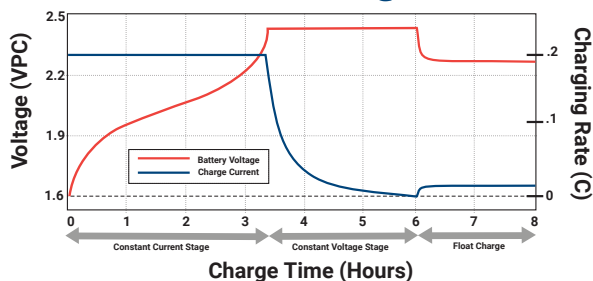

APPROVALS



- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- ISO9001:2015 - Quality management systems

FURTHER INFORMATION

Please refer to our website www.power-sonic.com or email us at technical-support@power-sonic.com for a complete range of useful downloads such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.