



EVAC-19i (NA) Specifications

Accelerating mass adoption of electric vehicles by delivering sustainable EV charging solutions that can be deployed anywhere

EVAC-19i (NA)

19.2kW AC Level 2 Charger

FEATURES


- Designed for easy installation and maintenance
- Commercial grade EV charging station
- RFID card reader
- SAE J1772 Type 1 connector
- Ethernet, 4G and Wi-Fi network connections
- NEMA 3R rated design ideal for outdoor installation
- Wall-mounted or floor mounted with a pedestal
- Local load management
- OCPP 1.6J compliant



SPECIFICATIONS

| | |
|-------------------------------|--|
| Connector Type | SAE J1772 Type 1 |
| Output Power | 19.2 kW |
| Output AC Current | 80 A |
| Supply Input | 208 / 240 VAC split phase (+/- 10%) |
| Supply Frequency | 50 / 60 Hz |
| Wiring Type | Hardwired |
| Network Connection | Ethernet, 4G (LTE Cat. M1/ Cat. NBIoT), Wi-Fi (802.11 b/g/n) |
| Communication Protocol | OCPP1.6J |
| Operating Temperature | -31°F (-35°C) to 131°F (55°C) |
| Display | Dot-matrix |
| IP Rating / IK Rating | NEMA 3R / IK10 |
| Standards | UL 50/ 991/ 1449/ 1998/ 2231/ 2594 FCC Part 15B |
| Mounting | Wall or floor mounted using a pedestal |
| RFID | ISO 14443 A/B, ISO 15693, NFC |
| Metering Accuracy | Embedded, ± 1% |
| Charging Cable | Tethered 25 ft type 1 |

DIMENSIONS INCH

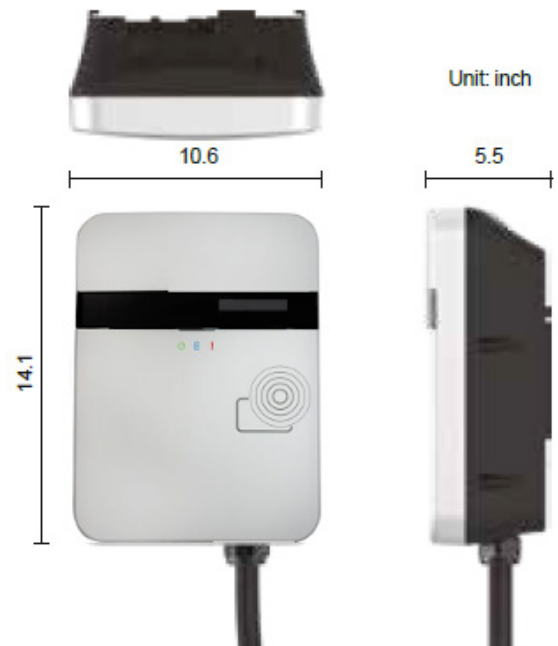

EVESCO
(PART OF POWER SONIC CORP.)
NA, LATAM & APAC
365 Cabela Dr Suite 300,
Reno, Nevada 89439
USA
T: +1 775 824 6500
E: evesco@power-sonic.com

EMEA
Smitspol 4, 3861 RS,
Nijkerk
The Netherlands
T: +31 33 7410 700
E: evesco@power-sonic.com

evesco.com