



EVMO-208V Specifications

Accelerating mass adoption of electric vehicles by
delivering sustainable fast charging solutions that can be
deployed anywhere




EVMO-208V

208V Variable Output Mobile Fast Charger

FEATURES

- Designed for mobile EV fast charging
- User-friendly interface with an LCD touchscreen display
- CHAdeMO, CCS1, CCS2, NACS and GB/T compatible
- 208 volts three-phase input for North American market
- High-performance charging module with a wide charging range
- Robust castors for quick and easy movement
- High efficiency at $\geq 95\%$
- Ideal for various applications, including service stations, auto dealerships, fleet operators, and more

- Switch between CHAdeMO, CCS1, CCS2, NACS, GB/T charging cables with untethered design
- Untethered input enabling multi location and multiple outlet connections

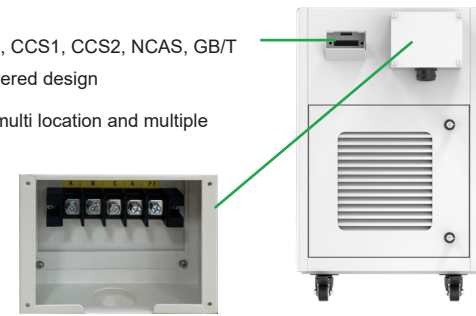

SPECIFICATIONS	
Charging Outlet	CHAdeMO, CCS1, CCS2, NACS and GB/T
Output Power	Variable - up to 60 kW
Output Voltage	0 - 500 Vdc (120 A)
Phase	3-phase + NE + PE
Supply Input	208 Vac
Supply Frequency	60 Hz (+/- 10%)
Efficiency	$\geq 95\%$
Power Factor	≥ 0.99
Stable Voltage Accuracy	$\geq (+/-) 0.5\%$
Stable Current Accuracy	$\geq (+/-) 1\%$
Cable Length	5 m (16.4 feet) as standard
Emergency Stop Button	Yes

SPECIFICATIONS CONT..	
LCD Display	10 inch touchscreen
IP Rating	IP54
Startup Mode	Plug-and-play or RFID card
Communication Protocol	OCPP 1.6
Connectivity	3G, 4G and Wi-Fi
Operating Temperature	-22°F (-30°C) to 149°F (65°C)
Operating Humidity	5%-95% without condensation
Dimensions (W x L x H) Inch (mm)	20.9 x 30.2 x 44.6 (530 x 766 x 1133)
Weight	~155 kg (342 lbs)
Protection	Over/under voltage protection, overload protection, short circuit protection, over/under temperature protection, surge protection, communication failure
MTBF (Mean time before failure)	100,000 hours

VARIABLE OUTPUT POWER: 0-500 VDC (120 A CONSTANT CURRENT)

Battery Voltage (V)	25	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500
Output Power (kW)	3	6	9	12	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60



EVESCO
(PART OF POWER SONIC CORP.)
NA, LATAM & APAC
365 Cabela Dr Suite 300,
Reno, Nevada 89439
USA
T: +1 775 824 6500
E: evesco@power-sonic.com

EMEA
Smitspol 4, 3861 RS,
Nijkerk
The Netherlands
T: +31 33 7410 700
E: evesco@power-sonic.com