

## **KEEPING YOU IN CHARGE**









# PSC-126000ACX 12V 6A

**Sealed Lead Acid Battery Charger ACX Battery Charger Series** 

## **FEATURES**

- Universal input voltage range 90VAC 240VAC
- Automatic, current sensing dual-rate charging for efficient, care-free and safe operation
- LED indicators
- Universal leads & plugs


## **APPROVALS**

- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- DOE
- ISO9001:2015 Quality management systems
- **FCC**

ETL

CE

### **CHARGER CHARACTERISTICS**

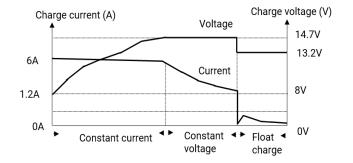

#### **GLOBAL HEADOUARTERS**

(USA AND INTERNATIONAL EXCLUDING EMEA)

**Power-Sonic Corporation** 365 Cabela Dr Suite 300, Reno, Nevada 89439 USA

T: +1 775 824 6500

E: customer-service@power-sonic.com

#### **POWER-SONIC EMEA**

(EMEA - EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk, The Netherlands

T NL: + 31 33 7410 700 TUK: +44 1268 560 686 TFR: +33 344 32 18 17

E: salesEMEA@power-sonic.com

#### PERFORMANCE SPECIFICATIONS

#### Input Specs

AC input voltage rating 100Vac-240Vac AC input frequency rating 50Hz-60Hz AC input voltage range 90Vac-240Vac AC input frequency range 47Hz-63Hz

AC input current 1.5A@115Vac/0.9A@230Vac

110W AC input power AC static state current 100mA

#### **Output Specs**

Output voltage range 8-15Vdc Output power 90W 6A@12Vdc Bulk charge current rating 14.7Vdc Bulk charge voltage rating 13 2Vdc Float charge voltage rating Light switching current 1.2A

#### General Specs

Efficiency 77% Over load protection <8A Short circuit protection Yes Reversed polarity connectors protection 0°C-40°C Operating temperature -30°C-85°C Storage temperature 810g Net weight 165\*95\*60mm Dimensions Plastic Case Enclosure Indoor Application Wall mounting

## Charger type Safety Specs

Withstand voltage (Hi-Pot) 3000Vac ≤ 10mA (60s) Insulation resistance >100MΩ @500Vdc ETL/CE Safety standard Compliance

#### **LED Indicator Status**

Green - Float charge Green Flash - Power on and empty load Red - Bulk charge Red Flash - Short circuit or reversed polarity

## **MODELS - INPUT PLUGS & CONNECTIONS**

MODELS - INI OT I LOUS & CONNECTIONS		
Part Number	Input Plug	Output Connection
PSC126000ACX-US	NEMA-A	Alligator Clips
PSC126000ACX-EU	CEE-C	Alligator Clips
PSC126000ACX-UK	BS-G	Alligator Clips
PSC126000PS-US	NEMA-A	Alligator/Ring Clips
PSC126000PS-EU	CEE-C	Alligator/Ring Clips
PSC126000PS-UK	BS-G	Alligator/Ring Clips

#### **FURTHER INFORMATION**

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, safety data sheets, ISO certification, etc.